

EXPLANATION

— 2000 —
OVERBURDEN ISOPACHS - Showing thickness of overburden, in feet, from the surface to the top of the Fruitland 2 coal bed. Isopach interval 400 feet (122 meters). Isopachs long dashed where inferred, short dashed where projected through monocline-bearing area. Supplemental 200-foot (61-meter) and 1,000-foot (305-meter) overburden isopachs added.


○ 0350
DRILL HOLE - Showing thickness of overburden, in feet, from the surface to the top of the Fruitland 2 coal bed.

— 10 —
MINING-RATIO CONTOUR FOR FRUITLAND 2 COAL BED - Number indicates cubic yards of overburden per ton of recoverable coal by surface-mining methods. Contours shown only in areas suitable for surface mining within the strip-mining limit. Strip-mining limit is 200 feet (61 meters) of overburden.

To convert cubic yards per ton to cubic meters per metric ton, multiply cubic yards per ton by 0.842.

— — — — —
FAULT - Dashed where approximately located; bar and bell on downthrown side.

To convert feet to meters, multiply feet by 0.3048.

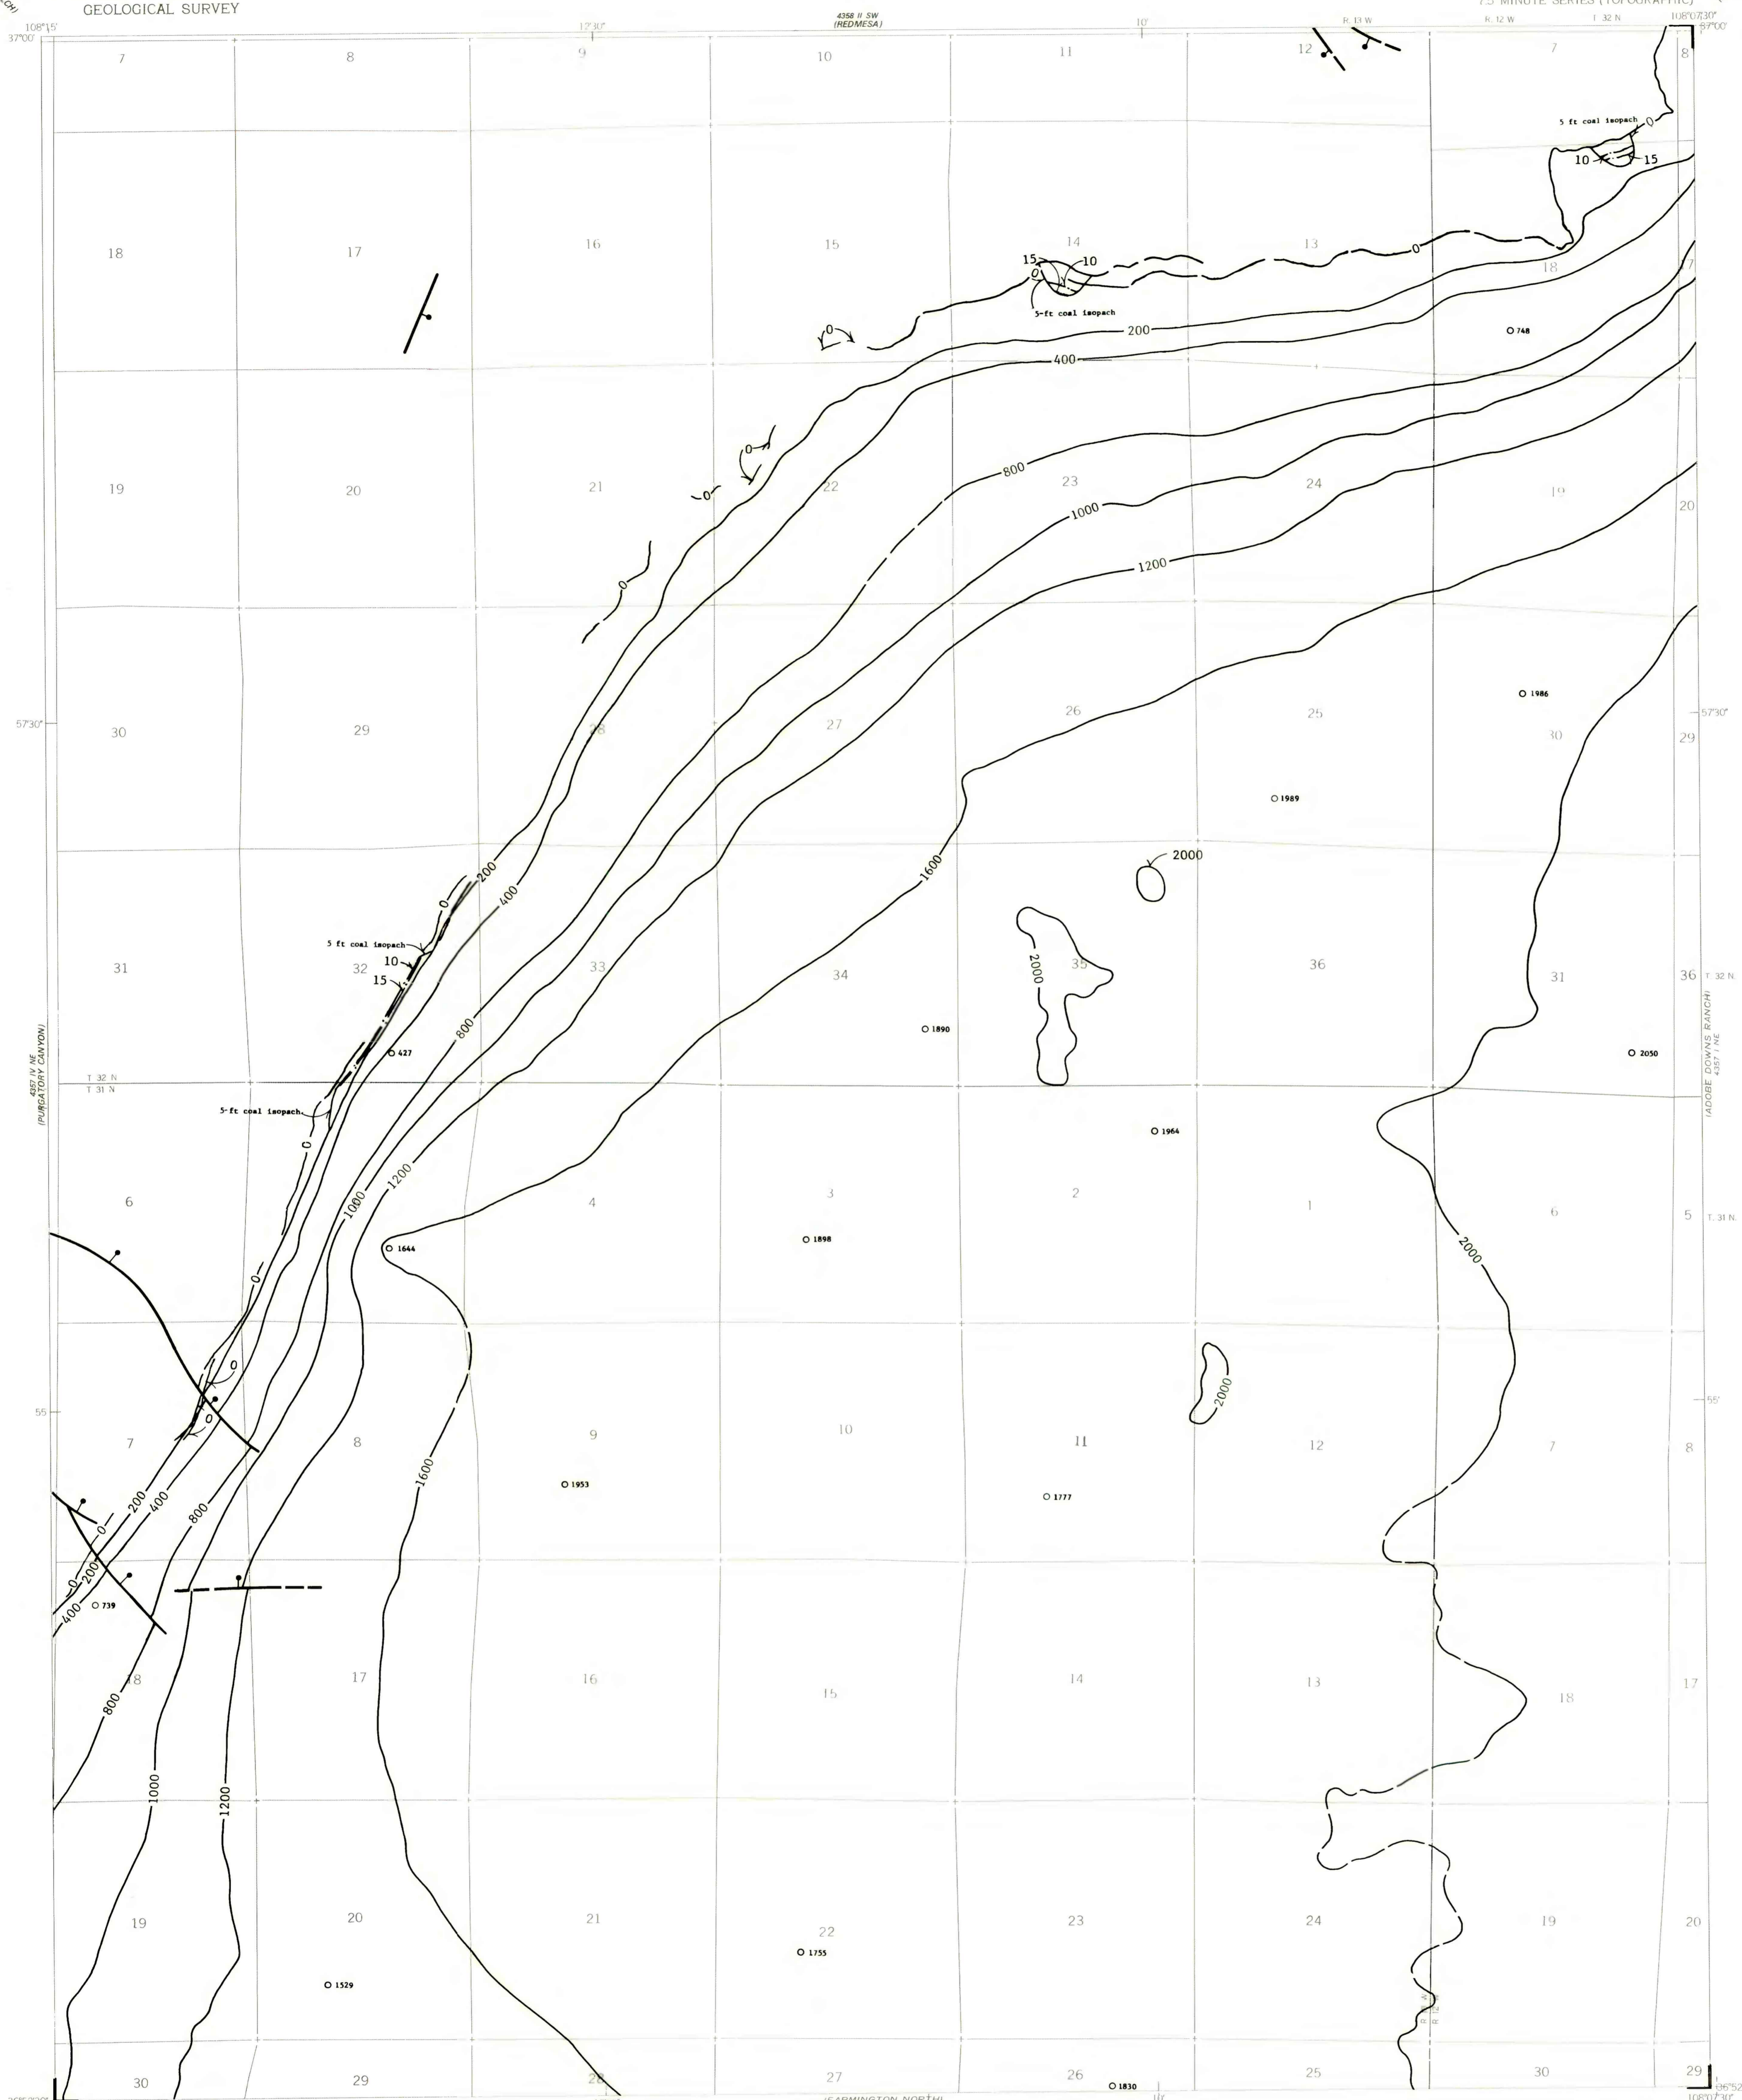

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE,
SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO
BY
DAMES & MOORE
1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.