

United States
Department of the Interior
Geological Survey

MULTICHANNEL SEISMIC-REFLECTION PROFILES COLLECTED
IN 1977 OFF OF THE NORTHERN CALIFORNIA AND OREGON COAST

by

¹DAVID S. McCULLOCH, DENNIS M. MANN, HOLLY F. RYAN, and RAY W. SLITER

U.S. Geological Survey
Open File Report
86-406

This report is preliminary and has not been edited or reviewed for conformity with Geological Survey standards and nomenclature.

Any use of trade names and trademarks in this publication is for descriptive purposes only and does not constitute endorsement by the U.S. Geological Survey.

¹U.S. Geological Survey, Menlo Park, CA

1986

MULTICHANNEL SEISMIC-REFLECTION PROFILES COLLECTED
IN 1977 OFF OF THE NORTHERN CALIFORNIA AND OREGON COAST

by
DAVID S. McCULLOCH, DENNIS M. MANN, HOLLY F. RYAN, and RAY W. SLITER

During May of 1977 the U.S. Geological Survey (USGS) collected approximately 2233 km of 24-channel seismic reflection data across the continental margin of Northern California and Oregon (Fig. 1). The profiles were collected on the USGS Research Vessel S.P. Lee using a sound source of five airguns with a volume of 1326 cubic inches of air compressed to approximately 2000 psi. The recording system consisted of a 24-channel, 2400 meter-long streamer with a group interval of 100 m, and a GUS (Global Universal Science) model 4200 digital recording instrument. Shots were fired every 50 meters. Navigational control for the survey was provided by a Marconi integrated navigation system using transit satellites and doppler-sonar augmented by Loran C (Rho-Rho). A 2-millisecond sampling rate was used in the field; the data were later desampled to 4-milliseconds during the demultiplexing process. Record lengths vary from 5 to 9 seconds depending on water depth and geologic structure, to give 5 seconds of data below the seafloor. Processing was done at the USGS Pacific Marine Geology Multichannel Processing Center in Menlo Park, California, in the sequence: editing-demultiplexing, velocity analysis, CDP stacking, deconvolution-filtering, and plotting on an electrostatic plotter. Plate 1 is a trackline chart showing shotpoint navigation.

The data are available in the following formats:

- 1) Electrostatically plotted profiles which have been deconvolved and filtered after stacking. Copies of the profiles may be purchased through:
National Geophysical Data Center
NOAA/EDIS/Code D64
325 Broadway
Boulder, Colorado 80302
- 2) Digital magnetic stack tapes which have been processed using velocities derived from velocity analysis. These tapes are not deconvolved or band-pass filtered. Copies of the stack tapes and a description of the tape format can be obtained at the requesters expense by contacting:
Dennis M. Mann
Pacific Branch of Marine Geology
U.S. Geological Survey
345 Middlefield Rd. MS 979
Menlo Park, California 94025
- 3) Digital magnetic demultiplexed tapes. These tapes have been edited for missed shots, blanking times, and muting times. Copies of the demultiplexed tapes and a description of the tape formats can be obtained at the requesters expense by contacting Dennis Mann at the above address.

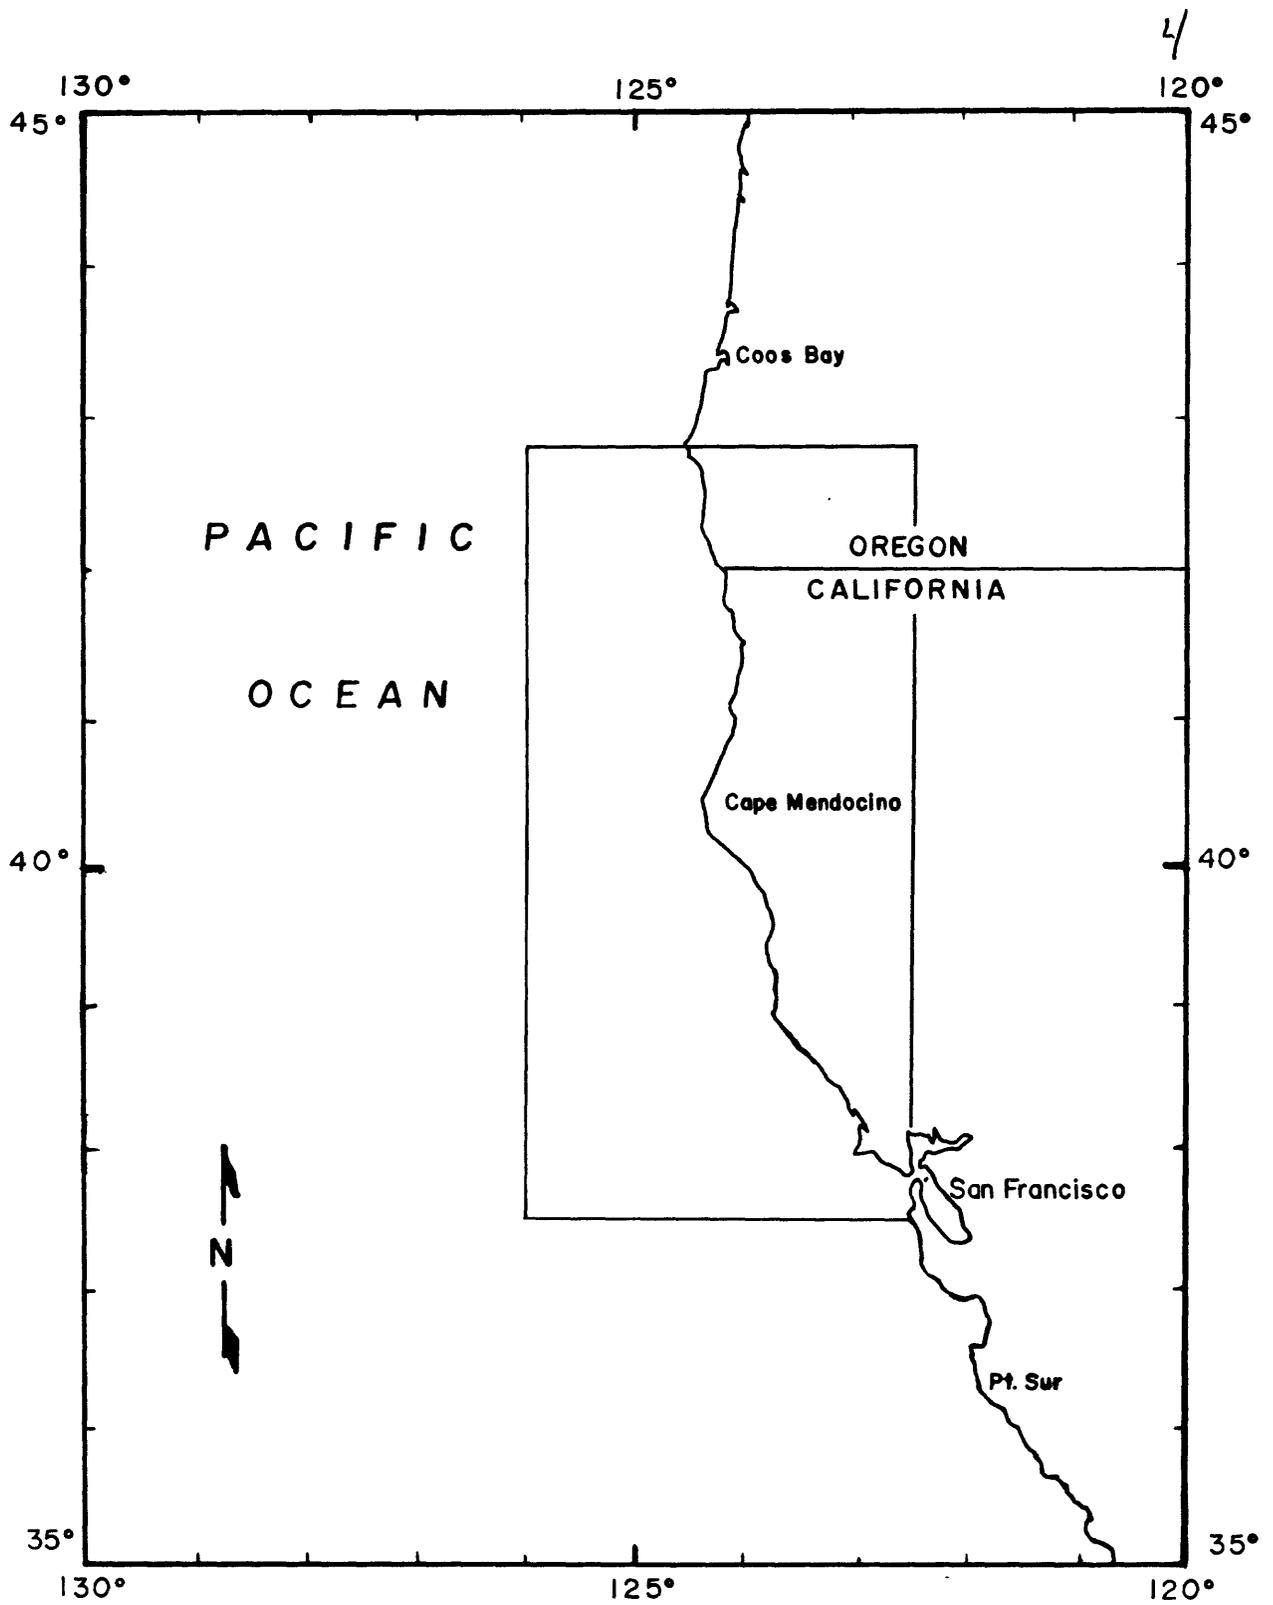


FIGURE 1. AREA OF STUDY. PLATE I SHOWS DETAILED LOCATION OF TRACKLINES AND SHOTPOINTS.