



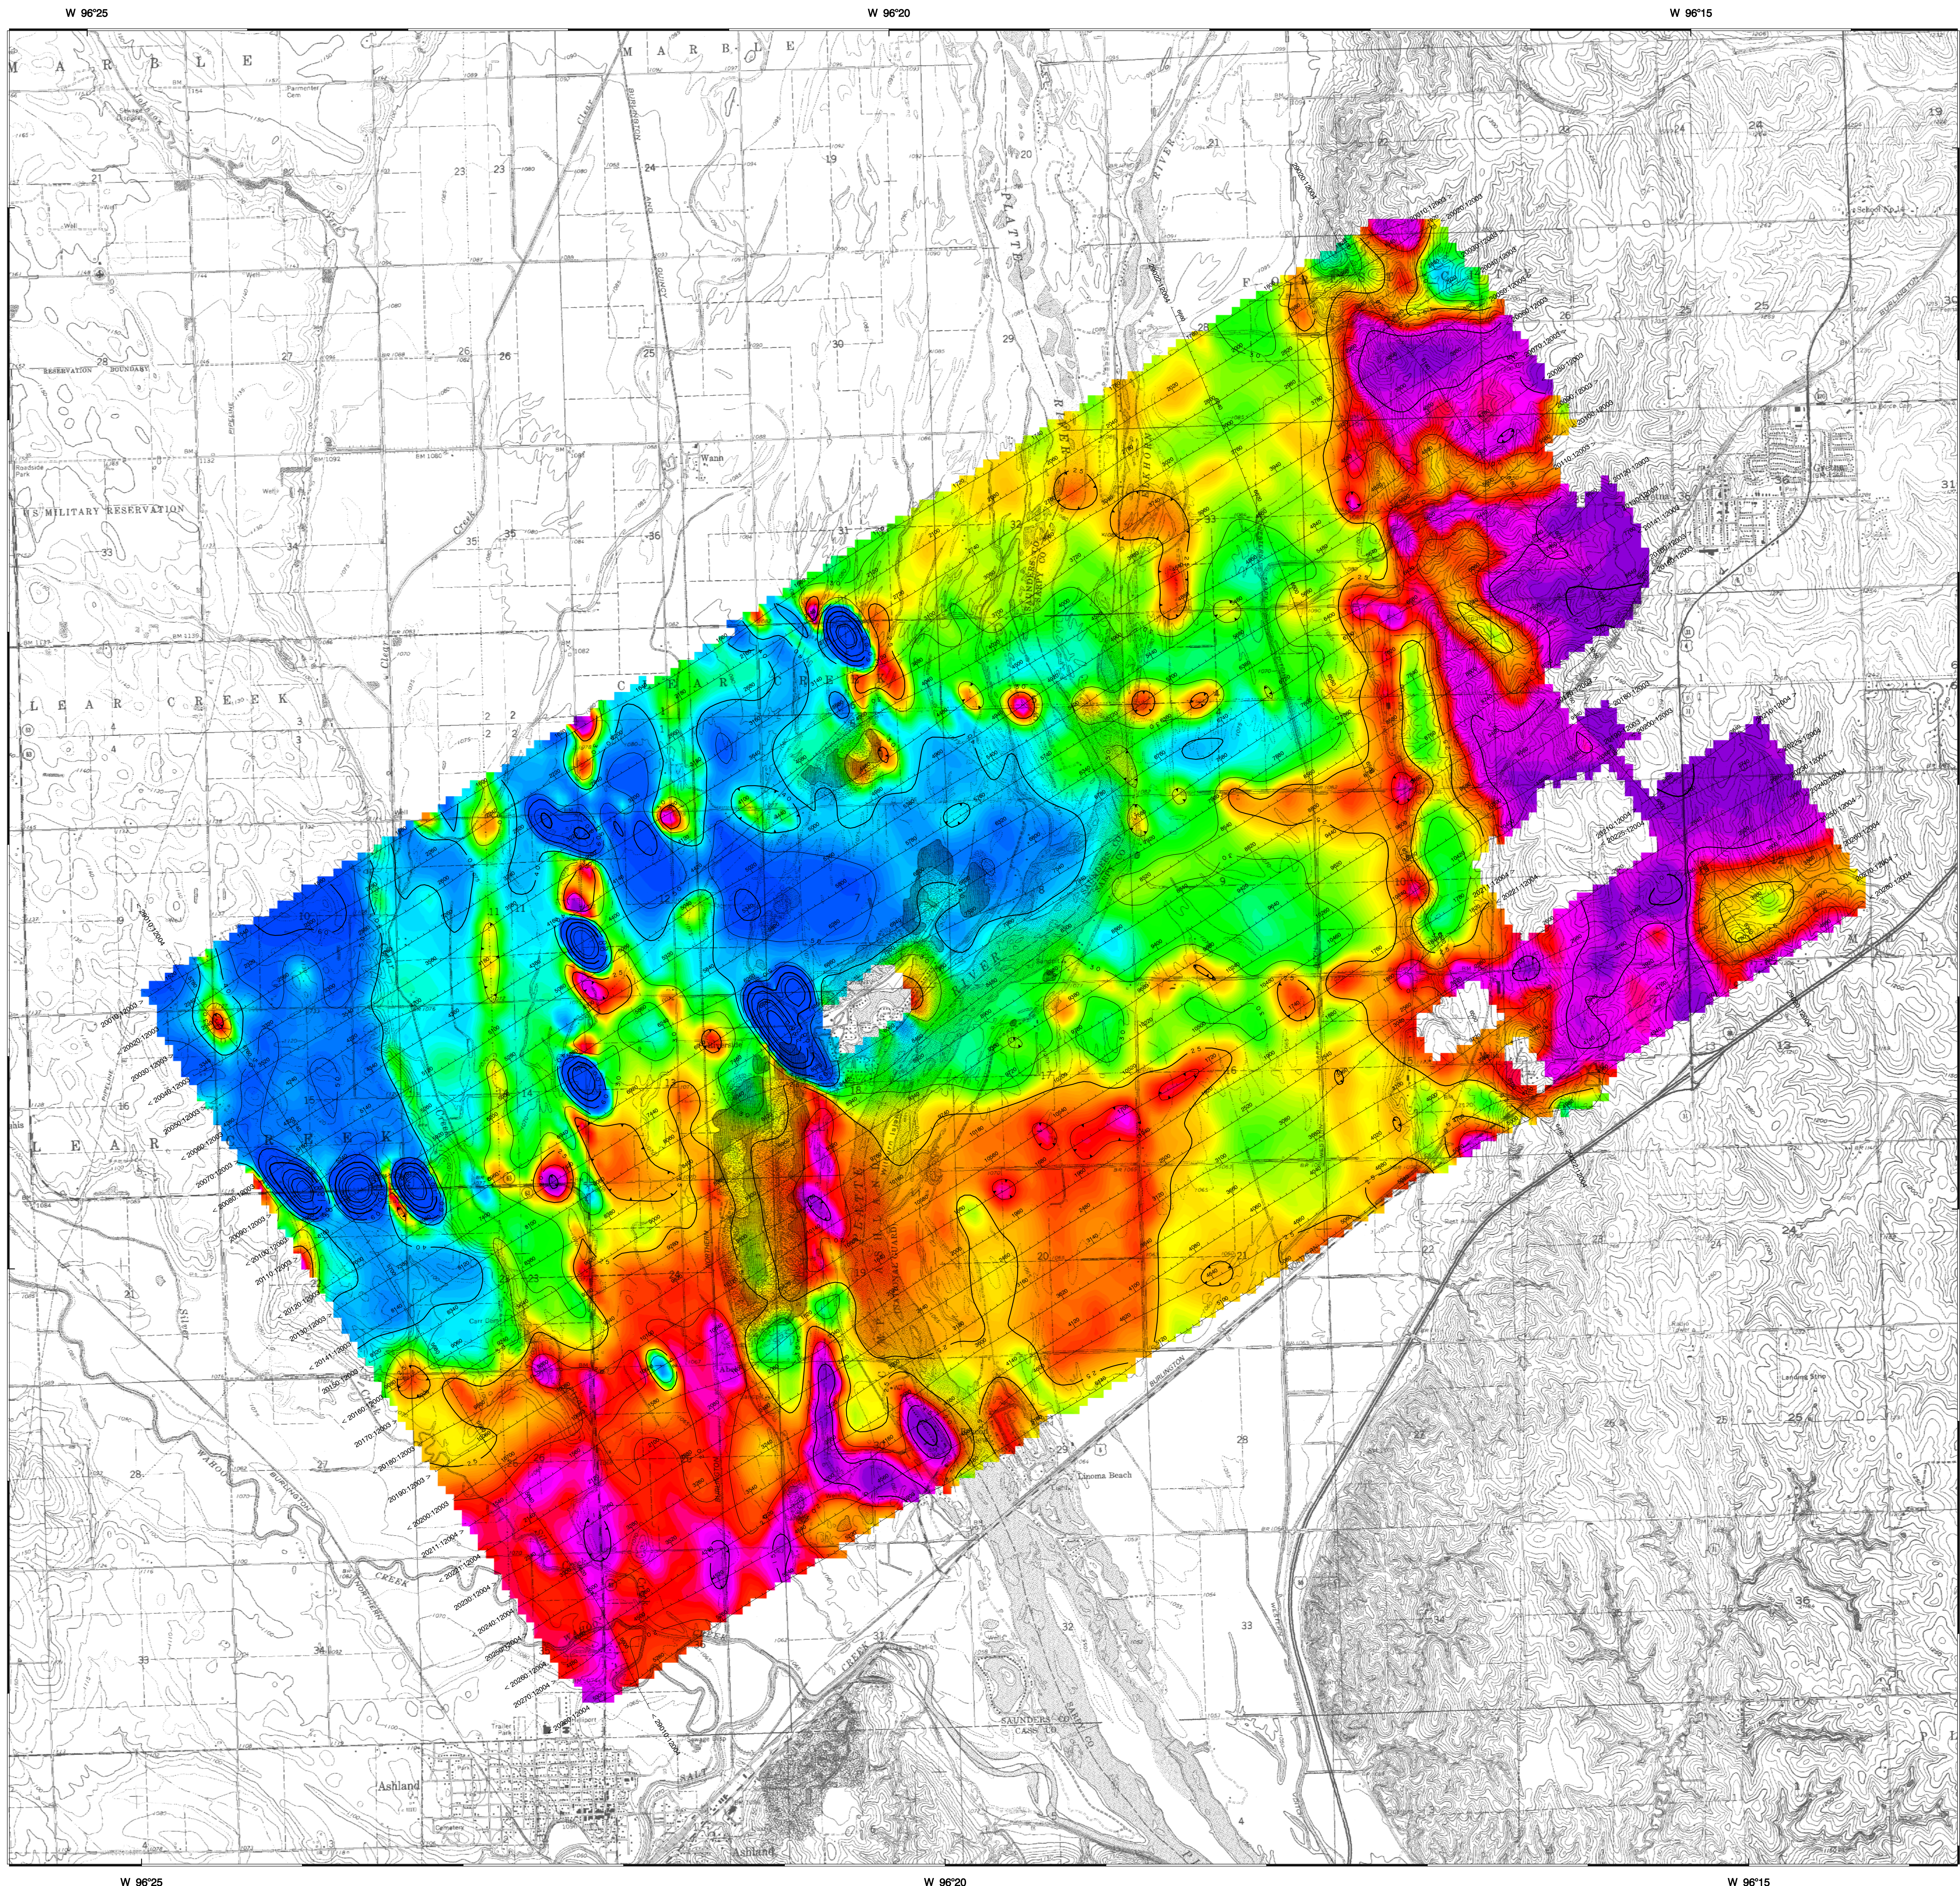


TECHNICAL SUMMARY

Navigation	Differentially-corrected GPS
Date reduction grid interval	70 metres
Terrain clearance	Helicopter 57 m
	Electromagnetic sensor 30 m
	Magnetometer 30 m
	0.1 second
Magnetometer / sensitivity	Cesium / 0.01 nT
Electromagnetic system	FUGRO RESOLVE
Regional field removed	International Geomagnetic Reference Field 2005
Date flown	March 26, 2007


Frequency	Sensitivity	Coil Orientation
3300 Hz	0.12 ppm	Vertical coplanar
400 Hz	0.12 ppm	Horizontal coplanar
1500 Hz	0.12 ppm	Horizontal coplanar
6200 Hz	0.24 ppm	Horizontal coplanar
25000 Hz	0.60 ppm	Horizontal coplanar
115000 Hz	0.60 ppm	Horizontal coplanar

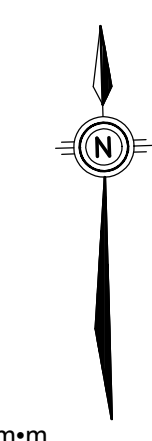

FLIGHT LINES

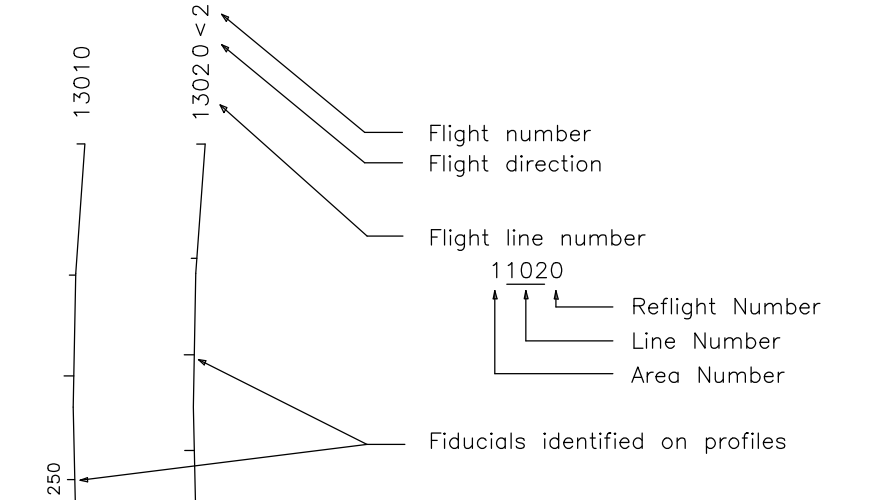


RESISTIVITY CONTOURS

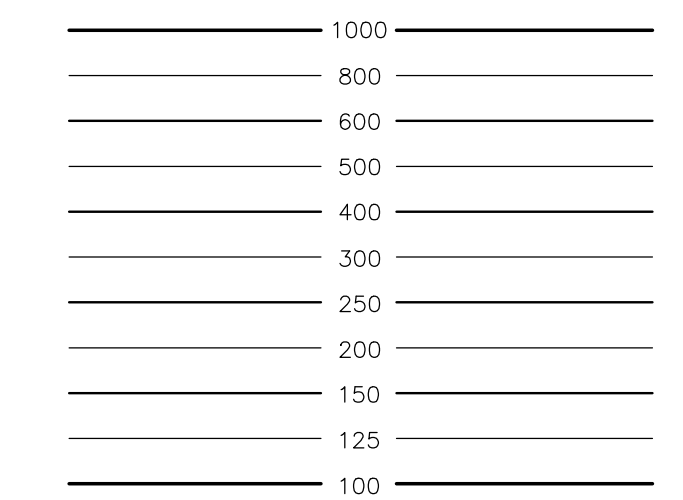

Contours in ohm-m at 10 intervals per decade.
Apparent resistivity calculated using a pseudo-layer half-space model (Fraser 1978).


LOCATION MAP

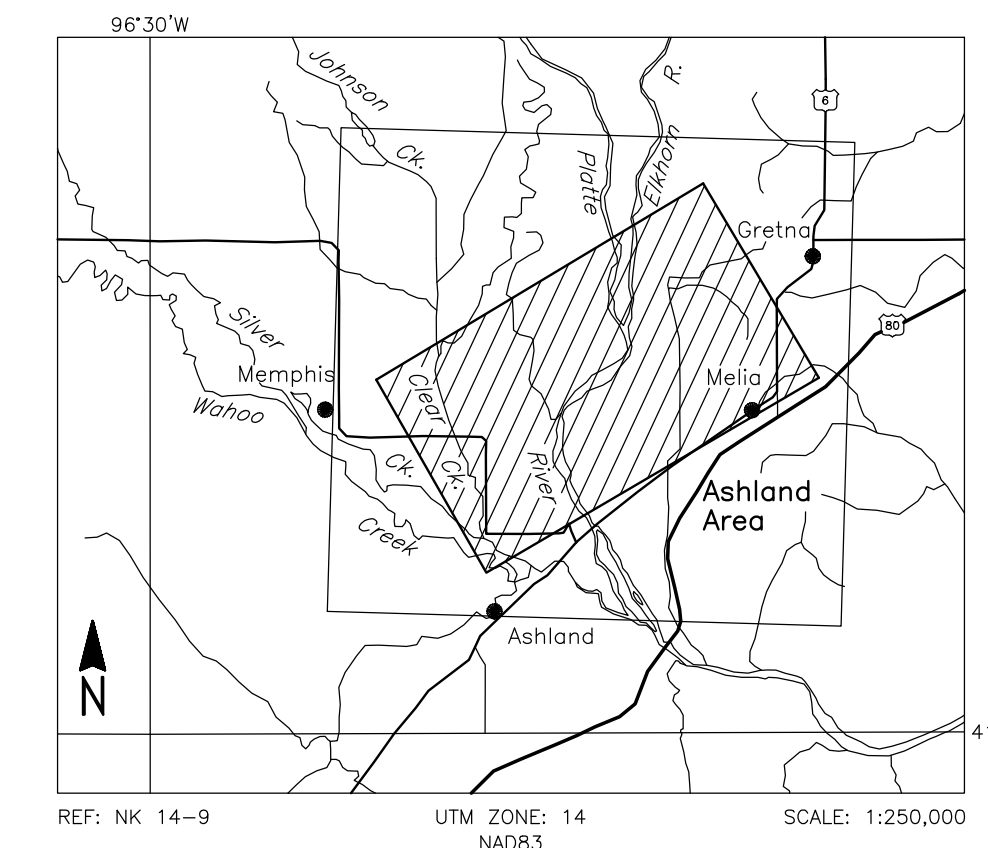

U.S. GEOLOGICAL SURVEY
ASHLAND AREA, NEBRASKA

APPARENT RESISTIVITY
1500 Hz COPLANAR

FUGRO RESOLVE SURVEY	REF: NK 14-9	GEOPHYSICIST:
DATE: APRIL, 2007	JOB: 07026	SHEET: 1
Fugro Airborne Surveys		

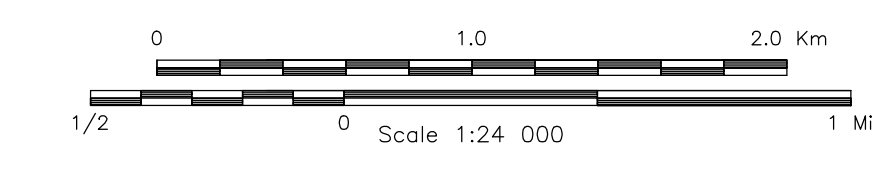

FUGRO AIRBORNE SURVEYS

