


U.S. Department of the Interior U.S. Geological Survey

Prepared in cooperation with the
City of Hattiesburg, City of Petal, Forrest County,
Mississippi Department of Homeland Security, Mississippi Emergency Management Agency,
and the Emergency Management District

Scientific Investigations Map 3228 Sheet 3 of 13

Pamphlet accompanies map

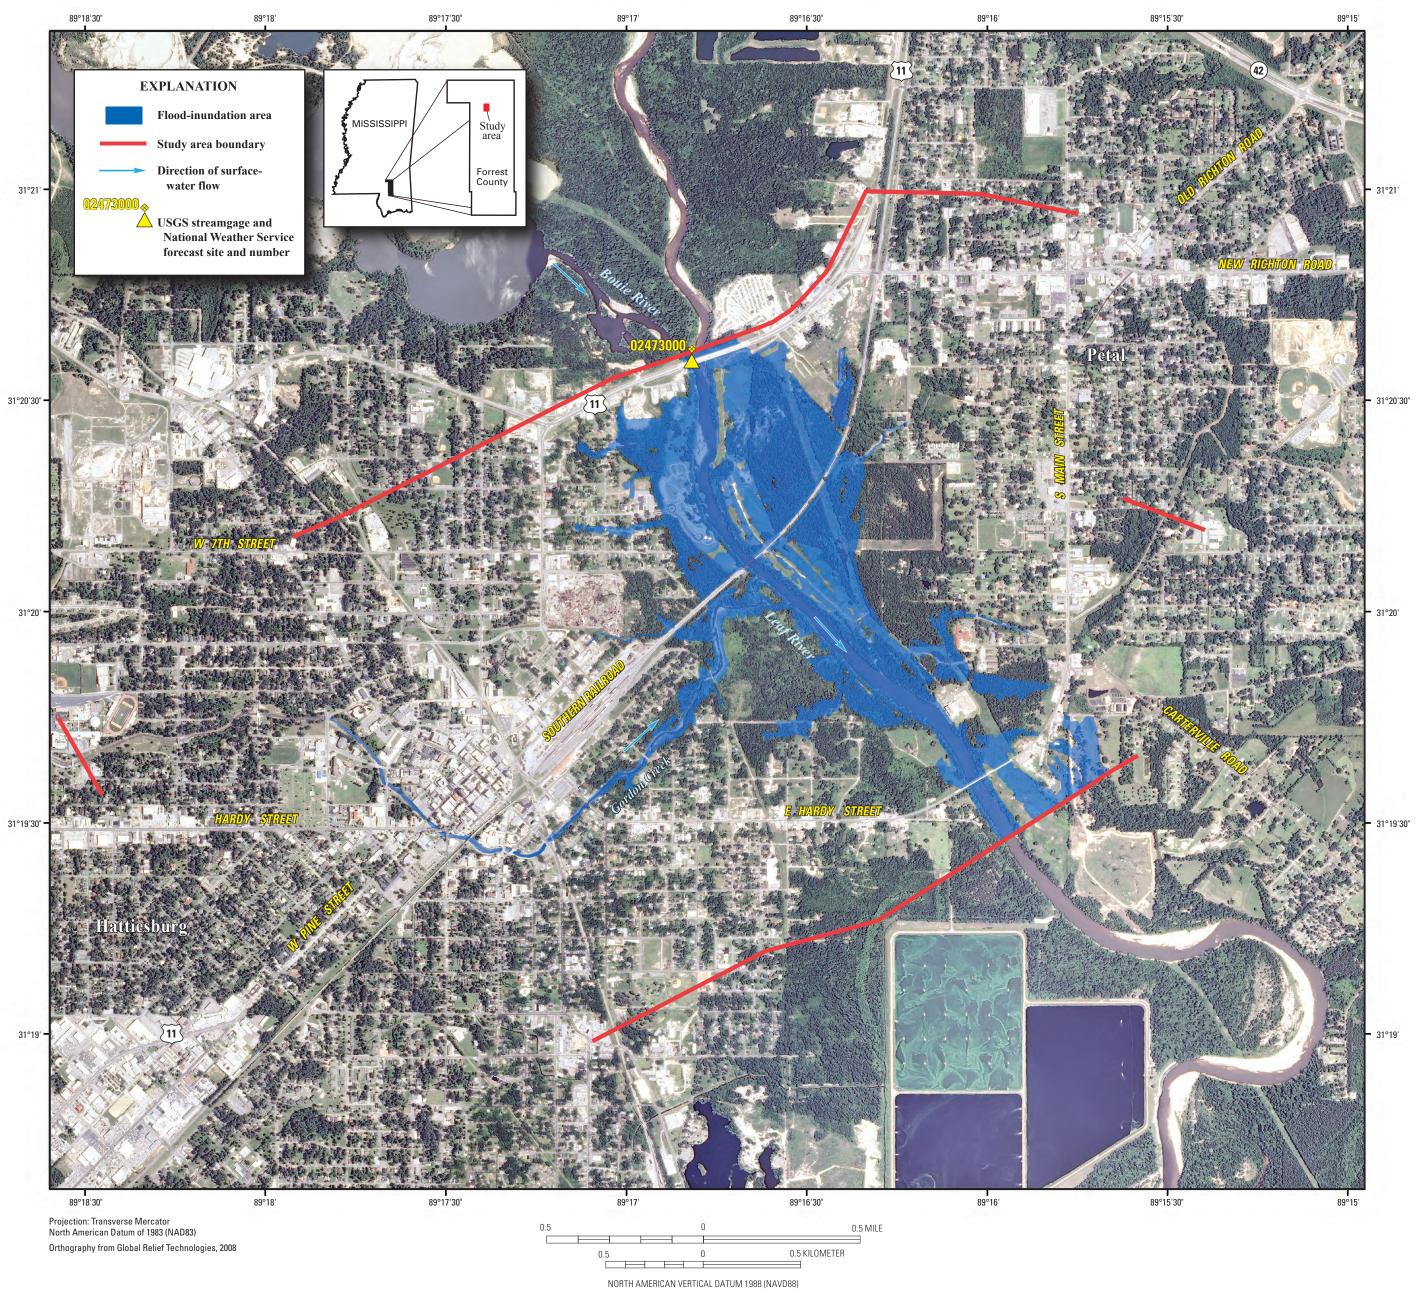

NCERTAINTIES AND LIMITATIONS FOR USE OF FLOOD-INUNDATION MAPS

Although the flood-inundation maps represent the boundaries of inundated areas with a distinct line, some uncertainty is associated with these maps. The flood boundaries shown were estimated based on water stages (water-surface elevations) and streamflows at selected USGS streamgages. Water-surface elevations along the stream reaches were estimated by steady-state hydraulic modeling, assuming unobstructed flow, and using streamflows and hydrologic conditions anticipated at the USGS streamgage(s). The hydraulic model reflects the land-cover characteristics and any bridge, dam, levee, or other hydraulic structures existing as of December 2011. Unique meteorological factors (timing and distribution of precipitation) may cause actual streamflows along the modeled reach to vary from those assumed during a flood, which may lead to deviations in the water-surface elevations and inundation boundaries shown. Additional areas may be flooded due to unanticipated conditions such as: changes in the streambed elevation or roughness, backwater into major tributaries along a main stem river, or backwater from localized debris. The accuracy of the floodwater extent portrayed on these maps will vary with the accuracy of the digital elevation map plates.

If this series of flood-inundation maps will be used in conjunction with National Weather Service (NWS) river forecasts, the user should be aware of additional uncertainties that may be inherent or factored into NWS forecast procedures. The NWS uses forecast models to estimate the quantity and timing of water flowing through selected stream reaches in the United States. These forecast models (1) estimate the amount of runoff generated by precipitation and snowmelt, (2) simulate the movement of floodwater as it proceeds downstream, and (3) predict the flow and stage (water-surface elevation) for the stream at a given location (AHPS forecast point) throughout the forecast period (every 6 hours and 3 to 5 days out in many locations). For more information on AHPS forecasts, please see: http://water.weather.gov/ahps/pcpn_and_river_forecasting.pdf.

DISCLAIMER
Inundated areas shown should not be used for navigation, regulatory, permitting, or other legal purposes. The USGS provides these maps "as-is" for a quick reference, emergency planning tool but assumes no legal liability or responsibility resulting from the use of this information.



Flood-Inundation Map for Hattiesburg, Mississippi, Corresponding to a Gage Height of 24.0 Feet and an Elevation of 142.18 Feet (NAVD 88) at U.S. Geological Survey Streamgage Leaf River at Hattiesburg, Mississippi (02473000)

By John B. Storm 2012 U.S. Geological Survey
308 Airport Road South
Jackson, MS 39208-6649
(601) 933-2900
Or visit the Mississippi Water Science Center Web site at:

Manuscript approved for publication August 8, 2012

Raleigh Publishing Service Center

For more information concerning this publication, contact:

http://www.usgs.gov/ 1-888-ASK-USGS

Director, Mississippi Water Science Center

http://ms.water.usgs.gov/
This report is available at: http://pubs.usgs.gov/sim/3228/.

Any use of trade, product, or firm names is for descriptive purposes only and does not imply endorsement by the U.S. Government.

This and other USGS information products are available at: http://store.usgs.gov/
U.S. Geological Survey, Box 25286
Denver Federal Center, Denver, CO 80225

To learn about the USGS and its information products visit